Celebrating







*Sears*1984 - 2024

Make Livestock Management a Breeze with Leicht's CIA

Leicht's CIA is a proudly Australian owned family company celebrating 40 years of manufacturing in 2024. Located in Goombungee, Queensland since 1984, the Leicht's CIA product range continues to keep customers returning time and time again. Our products are proven to stand the test of time whilst being safe, reliable and versatile to every situation.

At Leicht's CIA we manufacture products that are designed and engineered with input from experienced cattlemen and women with high regard to safety, dependability and capability of handling a diverse range of cattle breeds. From the larger parts right down to the smaller intricate details we pride ourselves on quality workmanship. Our products consist of hundreds of single components that are 100% manufactured in the Goombungee workshop. All our products and componentry are produced from predominantly Australian made steel. We pride ourselves on supporting Australian jobs.

Leicht's CIA products are held to the highest regard throughout the industry for their safety and design and are frequently recommended to cattle producers by their peers, local veterinarians, stock agents and also the Australian Veterinarian Association.

> We pride ourselves on manufacturing products to best suit the producers needs, therefore customers can customise products to best suit their work environment and further enhance job safety.

> > 'The Intelligent Livestock Equipment'





Mark Leicht, Managing Director

Why People choose us?

- 1. Safety
- 2. Reliability
- 3. Affordability

Invest in a Leicht's CIA product today. Safeguard your future with reduced labour costs, create a stress free working environment for both operators and animals as well as gaining maximum productivity of your herd.

Join the Leicht'e CIA family today!

INTERROGATOR

ELECTRIC OVER HYDRAULIC PRO-CHUTE



STANDARD FEATURES

- Toggle Control Operation
- Hydraulic heavy duty headbail
- Hydraulic V Style Squeeze
- Hydraulic split rear door
- 3 Phase or Single Phase electric motor supplied with hydraulic power unit

Refer to page 23 for full list of features

Customise your Hydraulic Pro-Chute See Pages 6 & 7





INTERROGATOR HYDRAULIC PRO-CHUTE



STANDARD FEATURES

- Lever Control Operation
- Hydraulic heavy duty headbail
- Hydraulic V Style Squeeze
- Hydraulic split rear door
- 3 Phase or Single Phase electric motor supplied with hydraulic power unit

Refer to page 23 for full list of features

Customise your Hydraulic Pro-Chute See Pages 6 & 7 INTRO

HYDRAULIC PRO-CHUTE

Country Industries Australia Est. 1984

STANDARD FEATURES

- Lever control operation
- Hydraulic MK5 Headbail
- Hydraulic Squeeze options available
 - o Double sided Parallel squeeze
 - o V-Style squeeze
- Hydraulic split rear door
- 3 Phase or Single Phase electric motor supplied with hydraulic power unit

Refer to page 23 for full list of features

Customise your Hydraulic Pro-Chute See Pages 6 & 7





YEARS NIVERSARY

OPTIONAL EXTRAS FOR HYDRAULIC PRO-CHUTES

WE WILL CUSTOMISE YOUR HYDRAULIC UNIT TO YOUR REQUIREMENTS

VET DOOR





SPLIT RACE GATE

 Placed into any part of your race leading up to the Pro-Chute.



REMOTE

SUPER SCOOP

Mounted nearside

or offside, with

located directly

control lever

above.

- Designed to work any of the hydraulic functions.
- 30 metre range
- Dual operation in conjunction with toggle system

MOTOR

• Petrol or Diesel options available for where power is not available



HONDA ENGINE



DIESEL ENGINE



Also available: Hydraulic Adjustable Bottom Squeeze

HYDRAULIC DRAFTING SYSTEMS



DRAFT ANIMALS FROM PRO-CHUTE INTO INDIVIDUAL PENS, EITHER STRAIGHT, LEFT OR RIGHT



INTERROGATOR 3-WAY DRAFT

• 5-Way draft also available



INTRO 3-WAY DRAFT



INTRO 5-WAY DRAFT

 5 Way Draft shown fitted to Intro Pro-Chute

Ask us about Auto Draft systems



IMMOBILIZER

PRO-CHUTE



STANDARD FEATURES

- Double Sided Parallel Squeeze
 - o 355mm fully engaged internal width
 - Upward lifting with ratchet lock
- Front operation of rear slide door to allow for single person operation from the headbail

Refer to page 22 for full list of features


OUTBACK PRO-CHUTE

STANDARD FEATURES

- Adjustable V Style Squeeze
 Ozoroz fully an accord interes
 - o 270mm fully engaged internal width
- Adjustable bottom for V style squeeze
- Head Extending Rails
- Front operation of rear sliding door to allow for single person operation from the headbail
- Pro-Chute floor

Refer to page 22 for full list of features



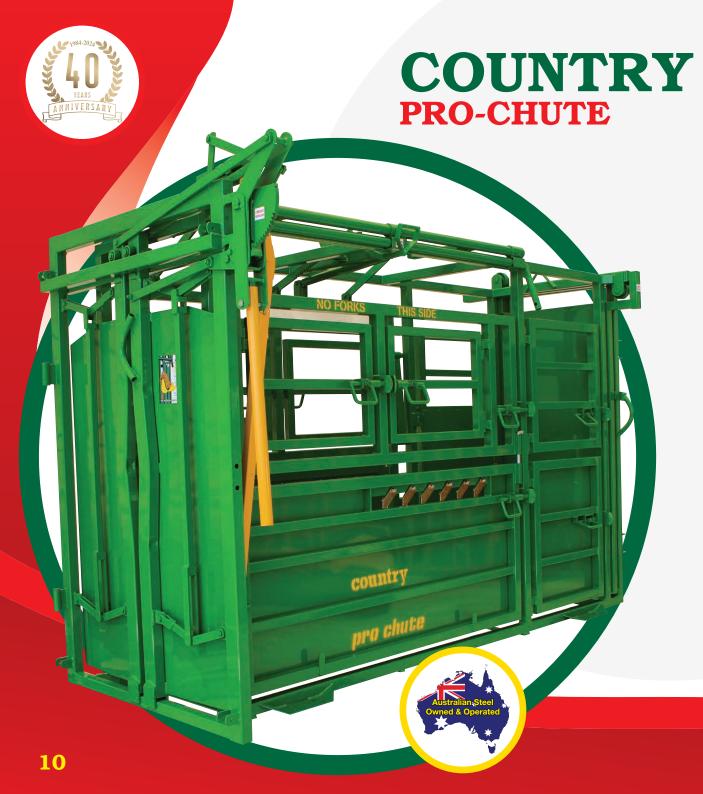

STANDARD FEATURES

- Single Sided Parallel Squeeze
 - o 475mm fully engaged internal width
 - Upward lifting with ratchet lock
- Two hinged upper swing out gates for direct access on both sides

Refer to page 22 for full list of features

STOCKMAN PRO-CHUTE

STANDARD FEATURES

- Single Sided Parallel Squeeze
 - o 475mm fully engaged internal width
 - Upward lifting with ratchet lock
- Two individual drop down upper side gates for direct access on operating side

Refer to page 22 for full list of features





STANDARD FEATURES

- Rear Ratchet Squeeze
 - o 420mm fully engaged internal width
 - Diagonal rear ratchet squeeze with ratchet lock on operating side
- Manual ratchet arm non operation side
- Two hinged upper swing out gates for direct access on both sides

Refer to page 22 for full list of features

BLACK BUTE PRO-CHUTE

STANDARD FEATURES

- Rear Ratchet Squeeze
 - o 420mm fully engaged internal width
 - Diagonal rear ratchet squeeze with bayonet
- Manual ratchet arm non-operating side

Refer to page 22 for full list of features





STANDARD FEATURES

Full draft gates on both sides, split horizontally on operating side

Refer to page 22 for full list of features

EXCLUSIVE

THE JACKAROO



- MK5 headbail
- Two drop down upper body access doors on operating side
- Front operation of rear door
- Front & rear open/close headbail operation
- ¾ sheeted rear slide door
- Full veterinary facilities
- Full draft gates on both sides, split horizontally on operating side
- Fully sheeted bottom split door
- Weigh bar mounting plates
- Yellow handles for operators visibility
- Available in nearside or offside operation

OPTIONAL MODIFICATIONS AVAILABLE

- Head extending rails
- Anti back up lugs
- Lower body access door

Available Only Through Nutrien Ag Solutions





MK5 HEADBAIL



STANDARD FEATURES

- Simple push-pull movement to open and close Ratchet Lock for ease of operation
- Fully sheeted to eliminate leg injury
- Heavy Duty
- Available in Nearside or Offside operation

OTHER HEADBAIL OPTIONS AVAILABLE:

- Straight doors (pictured)
- Extra Heavy Duty Upgrade
- Galvanised SHS
- Hot Dipped Galvanised

Yoke Door Shape is standard throughout our Pro-Chute Range.

CAN ALSO BE PURCHASED AS A STAND ALONE UNIT



STRAIGHT DOOR

YOKE SHAPE

SWINGARMS



SUPER SCOOP

- Designed to restrict side to side and up and down movement of the animals head
- Rubber lined

NECKBAR

- Designed to restrict animals up and down head movement
- Will lift the animals head from ground level and hold it at a desirable height

Both Swingarms are designed to reduce stress on the animal whilst in the Pro-Chute

SAFETY FEATURE

Both swing arms are fitted with quick release case hardened ratchet systems to avoid choking problems should the animal fall in the Pro-Chute.





PRO-CHUTE ACCESSORIES



ROOF KIT

- Protects against weather conditions
- Easy to assemble
- Flat packed for transport



HEAD EXTENDING RAILS

- Holds the animals head 60mm out from the face of the headbail
- Makes ear-tagging and dehorning more accessable

PRO-CHUTE FLOORS

Removable Two piece unitFully hot dipped galvanised



BAULK GATE

- Assists the operator in reducing the number of animals that slip through the headbail by blocking their path
- Can be fitted to the freestanding MK5 Headbail and any of our Pro-Chute range



OPTION 1

• Steel Floor with rubber



INDICATOR ARM

- Rotating arm designed to hold your weighing indicator
- Can be easily installed and removed.



CUSTOMISE YOUR PRO-CHUTE

CUSTOMISATIONS ARE ONLY ABLE TO BE FITTED DURING THE MANUFACTURING PROCESS



Did you know that you can also modify the length & width of your Pro-Chute to suit your requirements?

FULLY HOT DIPPED GALVANISED

- Pro-Chute is fully assembled and then disassembled as part of the galvanising process
- All doors and frames are internally vented and fully submersed, allowing the hot dipped galvanising to coat the inside and out of all SHS.
- Pro-Chute is fully reassembled after the process is complete

GALVANISED SHS UPGRADE WITH PAINTED FINISH

- Extend the life of your Pro-Chute by choosing a galvanised upgrade
- Duragal SHS frame & doors are all constructed using Gal SHS
- Zincanneal sheeting is used for all doors with the remaining components as per our standard Pro-Chute construction



Country Industries Australia Est. 1984

High Quality / Epoxy Enamel

Super Etch Primer

Australian Made Duragal plus grade C350 hot dipped galvanised strip, Galvanised inside & outside minimum average coating mass 100g/m2





CUSTOMISE YOUR PRO-CHUTE

CUSTOMISATIONS ARE ONLY ABLE TO BE FITTED DURING THE MANUFACTURING PROCESS

TIMBER SCANNING PANEL

 ID Scanner can be mounted to the scan panel, once installed



SPLIT REAR SLIDING DOOR

 Replace a standard rear sliding door

NEEDLE ACCESS DOOR

 To allow closer access to the neck area



OVERHEAD SCALE MOUNTS

 Allows you to mount your scales on top of your Pro-Chute rather than underneath



LOWER BODY ACCESS DOOR

 Used for semen collection, calf feeding and inspecting of feet and legs

OTHER CUSTOMISATIONS AVAILABLE:

- Modify the size of your Pro-Chute: Shorter, Longer or Wider to suit your requirements
- Rearrange door configuration

All available to customise your Pro-Chute to suit your requirements

MANUAL 3-WAY DRAFT





The Manual 3-Way Drafting System is designed to allow animals to be manually drafted 3 different directions once they have been processed through the Pro-Chute.

It allows the animals to be drafted either left, right or straight ahead which is all controlled by the hand levers located on the operating side. The manual 3-Way Drafting System also features a man access area before the drafting gates to allow access to the front of the Pro-Chute.

Manual 5-Way Draft also available

PORTABLE TRAP GATE

- Decrease the expense of mustering
- Easy to install, into an existing fence by using Leicht's CIA relocatable Yard Panels
- Can be changed between training and catching settings, by altering the spears from side to side, as shown





CATCHING 100MM



SELECTING THE RIGHT CATTLE PRO-CHUTE MANUAL PRO-CHUTES

| | IMMOBILIZER | OUTBACK | COUNTRY | STOCKMAN | BEEF KING | BLACK BUTE | RINGER |
|---|-------------|--------------|---------|----------|-----------|------------|--------------|
| Mk5 headbail | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | \checkmark |
| V-style squeeze | | ✓ | | | | | |
| Double sided parallel squeeze | ✓ | | | | | | |
| Single sided parallel squeeze | | | ✓ | ✓ | | | |
| Rear ratchet/bayonet squeeze | | | | | ✓ | ✓ | |
| Front & rear open/close headbail operation | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Head extending rails | | ✓ | | | | | |
| Front operation of rear side door to allow for single person operation | ✓ | ✓ | | | | | |
| Hot dipped galvanised checker plate pro- chute floor | | ✓ | | | | | |
| Three individual drop-down door uper side gates for direct access both sides | ✓ | ✓ | | | | | |
| Two hinged upper swing out gates for direct access both sides | | | ✓ | | ✓ | | |
| Two individual drop-down upper side gates for concentrated access on operation side | | | | ✓ | | | |
| Full draft gates, split horizontally both sides | ✓ | ✓ | | | | | |
| Full draft gates, split horizontally on operating side only | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| Fully sheeted bottom side door to eliminate leg injury | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Extra support bars on lower split gates | ✓ | ✓ | ✓ | | ✓ | | |
| Fully sheeted rear slide door with auto lock | ✓ | ✓ | ✓ | | ✓ | | |
| 3/4 Sheeted rear slide door with auto lock | | | | ✓ | | ✓ | ✓ |
| Anti-back up bar lugs | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Fully veterinarian facilities | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Foot operated vet gate for hands free operation | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Grease nipples on pivot points | ✓ | ✓ | ✓ | ✓ | | | |
| Weigh bar mounting plates | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Yellow handles for operator visibility | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Available in nearside or offside operation | ✓ | \checkmark | ✓ | ✓ | ✓ | ✓ | ✓ |

SELECTING THE RIGHT CATTLE PRO-CHUTE HYDRAULIC PRO-CHUTES



| | INTRO | INTERROGATOR - LEVEL CONTROL | INTERROGATOR - TOGGLE CONTROL |
|---|-------|---------------------------------|----------------------------------|
| Single Phase or 3 Phase Electric Motor | ✓ | ✓ | ✓ |
| Hydraulic Headbail with Yolk Door | ✓ | ✓ | ✓ |
| Hydraulic V-Style Squeeze | ✓ | ✓ | ✓ |
| Hydraulic Parallel Squeeze - Optional | ✓ | | |
| Hydraulic Split Rear Door | ✓ | ✓ | ✓ |
| Rotation Booms with lever controls | ✓ | ✓ | |
| Rotation Boom with toggle controls | | | ✓ |
| Electric Over Hydraulic System | | | ✓ |
| Individual Hydraulic Doors, pressure limited | ✓ | ✓ | ✓ |
| 45L Oil Tank - for cooler system | ✓ | | |
| 100L Oil Tank - For cooler system | | ✓ | ✓ |
| Main frame, squeeze frame & door frames constructed from 50 x $50 \times 4 \text{ RHS}$ | | ✓ | ✓ |
| 3 individual drop down upper side gates for access both sides | ✓ | ✓ | ✓ |
| Four Hinged lower side gates for feet & leg access - 2 each side | | ✓ | ✓ |
| Lower Body Access Door | ✓ | | |
| Full Exit Gates, Split Horizontally on both sides | ✓ | ✓ | ✓ |
| Fully Sheeted & Reinforced lower bottom side doors to eliminate leg injury | ✓ | | |
| Manual Adjustable bottom V-Style Squeeze | ✓ | ✓ | ✓ |
| Needle Access Door - Both sides | ✓ | ✓ | ✓ |
| 3mm Hot Dipped Galvanised Pro-Chute Floor | ✓ | | |
| 5mm Hot Dipped Galvanised Pro-Chute Floor | | ✓ | ✓ |
| Grease Nipples on pivot points | ✓ | ✓ | ✓ |
| Bushed Pivot Points on headbail | | ✓ | ✓ |
| Bushed Pivot points on rear door | | ✓ | ✓ |
| Anti Back-up Bar & Lugs | ✓ | ✓ | ✓ |
| Weigh Bar Mounting Plates | ✓ | ✓ | ✓ |
| Full Veterinary Facilities | ✓ | ✓ | ✓ |
| Head Extending Rails | ✓ | ✓ | ✓ |



SAFETY CONTROL PEN



Austalian made Duragal plus grade, C350 Hot Dipped galvanized strip, formed and welded by Austube mills, Galvanized inside & outside. Minimum average coating mass 100g m2. The Safety Control Pen has been designed to be safely operated from the elevated external walkway.

Its main purpose is to assist in single person operation for a smooth and stress-free flow of cattle into the race.

STANDARD FEATURES

- Gate control handle operated from the elevated external walkway with handrail (not shown in photo)
- Safety latch locking mechanism
- · Gate locking points every 300mm
- Fully galvanised and sheeted walls and swing gate
- Galvanised mesh walkway and checker plate steps
- 40x40x2.0mm galvanised RHS frames
- Available in clockwise and anti-clockwise

Optional rubber lined panels available



Image shown above is fitted with optional panel, sliding gate and walkway

CURVED RACE & CROWD PEN



The Curved Race & Crowd Pen are designed to move the cattle smoothly and continuously from the Crowd Pen to Curved Race and into the Pro-Chute, reducing stress on both animal and operator. It is a safe, efficient and economical way to work cattle.


It is recommended that the Curved Race and Crowd Pen be mounted on a concrete slab.

Custom Options Available

- Custom Designs
- Rotating swing gate in hydraulic option

STANDARD FEATURES

- Fully hot dipped galvanised australian standard as-nzs 4680.2006. Minimum of 600/gm2
- Elevated external walkway with handrail allows the operator to see ahead to the race and provides safety for the user and the ability for one person operation.
- Hot dipped galvanized curved rubber lined panels which are designed to create the half circle.
- A single gate pivots from an anchored center post which is operated from the elevated walkway.
- The rotating swing gate safety latch locks at 300mm intervals.
- Manually operated rotating swing gate
- Available in clockwise and anti-clockwise

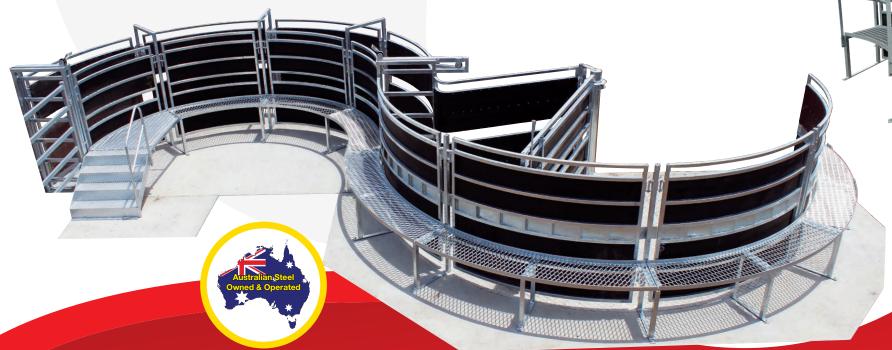

Handrail fitted to full length of walkway





RELOCATABLE YARD EQUIPMENT



STANDARD YARD EQUIPMENT

Rail size: 40x40 x2.0mm 100% Australian Made Steel



YP12A 2.200m long x 1.8m high 6 rails



MAPS 2.170m Panel with Man Access



GIF20S 2.170m Gate In Frame







OVAL RAIL YARD EQUIPMENT

Rail size: 75x40 x2.0mm 100% Australian Made Steel



KYP6 2.160m long x 1.8m high 6 rails



KMAG 2.170m Panel with Man Access



KG 2.160m Gate In Frame



KRH Race Hoop



SGO Sliding Gate in Frame



CATTLE KING YARD EQUIPMENT

Rail Size: 115x42 x2.0mm 100% Australian Made Steel



KK5 2.180m long x 1.8m high 5 rails



KKMAG 2.170m Panel with Man Access



KKG 2.170m Gate In Frame



LOADING RAMPS

Country Industries Australia Est. 1984

4.8M RAMP

Fitted with 1.5m ramp extension with man access, catwalk and handrail, top sliding gate, side loading gate and platform





4.8M STANDARD

Also available in adjustable design



Fitted with 1.5m ramp extension with man access, catwalk and handrail.



Optional Walkway & Handrail Available on all ramps

All Loading Ramps are constructed from Oval Rail Material with timber floors





3M ADJUSTABLE



400 VEARS ANNIVERSARY

MOBILE PRODUCTS





MOBILE WHEEL KIT

 Designed so your pro-chute can be easily moved from one location to another

*Wheel Kit must be fitted at time of pro-chute manufacture

- Timber Floor
- Can carry up to 34 portable panels

3 METRE MOBILE LOADING RAMP



Designed to be filled at the storage shed and towed out to the paddock

- 2.5 Tonne capacity
- 4.8m bin length
- Fold up draw bar
- 16" tyres and rims on 8 leaf spring tamdem axel

*Products shown are not road registered. Road registration available on request.

GRAIN FEEDERS



KEY FEATURES

- Strong design
- Excellent weather protection
- Galvanized pipe skids
- Access Ladder
- Full length lid operated from the ground level
- Adjustable flow doors



DOUBLE SIDED GRAIN FEEDER

2.4m (8') 2.5 tonne capacity



DOUBLE SIDED GRAIN FEEDER

3.6m (12') 4.5 tonne capacity



DOUBLE SIDED GRAIN FEEDER

4.8m (16') 6 tonne capacity



SINGLE SIDED GRAIN FEEDER

7.2m (24') 10 tonne capacity

Also available, Single sided, 6m (20'), 8 tonne capacity



DOUBLE SIDED CALF GRAIN FEEDER

2.4m (8') 1 tonne capacity



CALF CREEP GATES are available to suit all Leichts CIA Grain Feeders

Grain Feeders are standard with a Zinc Trough and are fully painted

Full Zincanneal Options available





HAY FEEDERS



DOUBLE ROUND BALE OR LARGE RECTANGLE BALE FEEDER

- Galvanised steel constructed
- 3m long x 1.8m high x 1.5m wide

ROUND BALE FEEDER

- Galvanised Steel Constructed
- Three ring type constructed from 25NB
- 75mm x 50mm galvanized mesh
- 2.2m diameter






LARGE RECTANGLE BALE FEEDER

- · Galvanised steel constructed
- Supplied in flat pack
- Frame 40x40SHS with 25NB Bars
- 75x50 galvanized mesh around bottom
- 2.9m long x 1.4m high x 1.5m wide

MANUAL PRO-CHUTE BASE DIMENSIONS



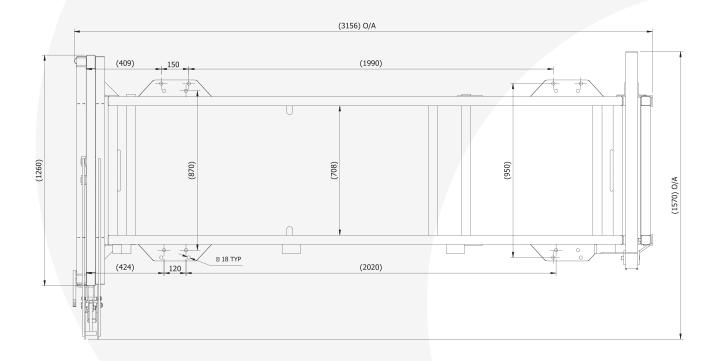

WARRANTY

Leicht's Country Industries Australia's equipment is covered by a full 12 month warranty against workmanship or faulty materials.

RESEARCH AND DEVELOPMENT

Products and specifications are subject to change without notice, due to our continual research and development program

SPARE PARTS


A full range of spare parts are kept at our factory and can be ordered through your local distributor.





Est. 1984



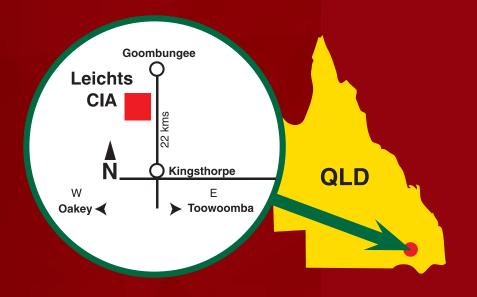

CONTACT US

Lot 10/11 Industrial Avenue, Goombungee, QLD, 4354 Po Box 91

Ph: (07) 4696 5200 Email: sales@leichtscia.com.au www.leichtscia.com.au